SNAPPER® DEALER SET-UP INSTRUCTIONS & PRE-SALE CHECKLIST for SNAPPER 20" W.B. SERIES O MOWERS

SNAPPER 20" W.B. Series O mowers use an engine kill system for CPSC compliance. These mowers are designed for quick set-up. The steps described in this instruction must be performed by the SNAPPER Dealer to prepare the mower for sale. The pre-sale checklist on Page 2 should be filled out as the items are checked and/or performed, and then be retained in the Dealer files when completed.

REMOVE SHIPPING BLOCKS

CAUTION: Blocks of wood are wedged between blade tips and inside lip of cutting deck for shipping purposes. These MUST be removed during set-up to permit starting engine.

TO REMOVE, place end of screwdriver blade inside lip and across end of blade and force blade away from lip until blocks are loose enough to be slipped out.

WARNING: Be careful to avoid cutting yourself on sharp edges of blade while removing shipping blocks!

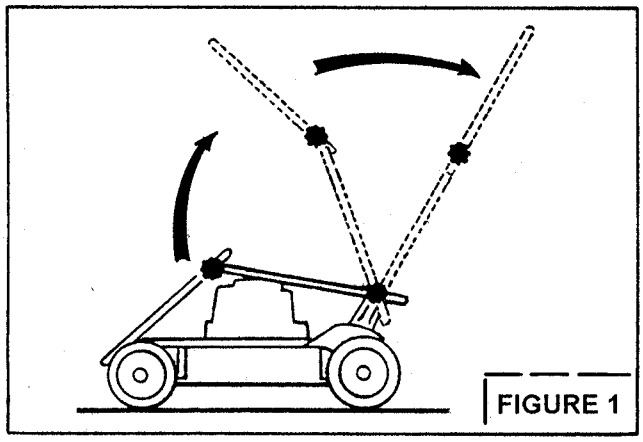

FIGURE 1

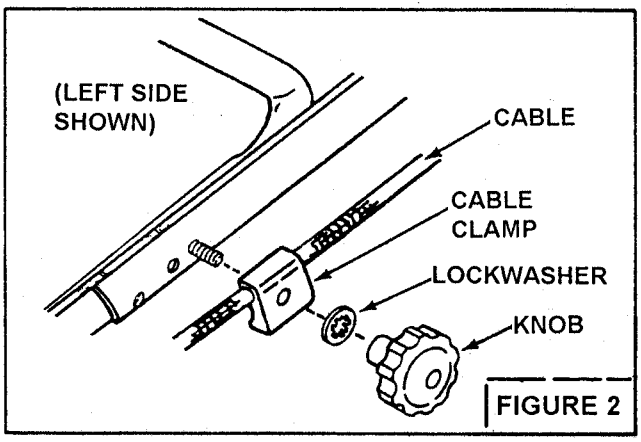

FIGURE 2

MOWER SET-UP

STEP 1: After removing unit from carton, loosen knobs and unfold handles as shown in Figure 1. Do this carefully to prevent cables from hanging up.

STEP 2: The blade control cable is located on the right side on some models and on the left side on others. Remove the top knob on appropriate side and install the cable clamp as shown in Figure 2.

STEP 3: On all models, install cable and harness clips with openings facing outward as shown in Figure 3. Capture cables, rods or wiring harness in loop of clip, then install upper clips about 2" below the bottom edge of the upper handle and the lower clips about 2" above the tip edges of the lower handle mounts.

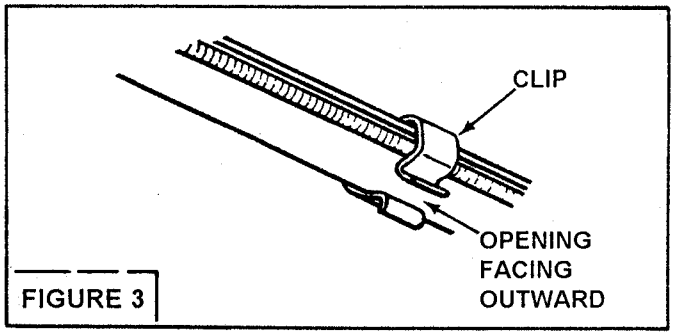

FIGURE 3

GRASS BAG & ADAPTER

On models with the grass bag adapter, install the grass catcher by sliding the connector down over the adapter flange first, then lower the support frame hooks over the middle handle.

SIDE CHUTE (When Supplied)

The side chute attaches to the mower at two points. The lower stud behind the rigfht front wheel is not used for attaching the chute. Install side chute as follows:

STEP 1: Guide the side chute into position over the stud on the side of the deck near the rear wheel first, then position over the stud on top of the deck.

STEP 2: Make sure the side chute goes under the interlock spring and raises the contact point off the deck during installation. Secure the side chute at the two points with wing-nuts.

NOTE! Be sure to fill in the PRE-SALE CHECKLIST on Page 2.

(Over)

INSTRUCTION No. 2-8482 (I.R. 11/94)

CHECKLIST for SNAPPER 20" W.B. SERIES O MOWERS

The following must be accomplished prior to sale. Review this list with purchaser, check (✓) items actually performed and sign below.

SET-UP

____HANDLES installed per instructions on reverse side and height adjusted.

____SIDE CHUTE or ADAPTER and grass bag assembled to mower per instructions on reverse side.

____BLADE SHIPPING BLOCKS removed per instructions on reverse side.

____BLADE RETAINING BOLT torque checked (30 foot pounds).

LUBRICATION

____ENGINE OIL added as needed to bring level up to full (4-cycle only).

____OIL mixed with fuel in specified ration (2-cycle only).

OPERATIONAL TESTS

____CUTTING HEIGHT adjusted & checked for proper operation.

____CHUTE INTERLOCK checked to insure proper functioning.

____ENGINE started, engine control settings and RPM (3500 plus or minus 100) checked and adjusted.

CPSC COMPLIANCE TEST

____BLADE CONTROL stops engine when released.

DEMONSTRATION & INSTRUCTION

____PERSONALLY HANDED Operator's Manual & Mower Safety Booklet to purchaser.

____INSTRUCTED purchaser to read and follow instruction in Operator's Manual.

____DEMONSTRATED proper starting procedure and operation of mower to purchaser.

____AIR CLEANER service and OIL procedure explained to customer.

____ASSISTED purchaser in completing Product Registration Card.

DEALER'S RECORDS

Sale Date_____ Model_____ Serial No._____

Dealer's Signature_____ Name_____

MOWER WILL BE USED COMMERCIALLY? YES_____ NO_____

Purchaser's Name_____ Signature_____

Address_____ City_____ State_____ Zip_____

IMPORTANT: This form is to be retained by the Dealer for future reference regarding Warranty, proof of purchase, traceability for product recall or service, etc.

SNAPPER® McDonough, GA., 30253 U.S.A.

INSTRUCTION No. 2-8482 (I.R. 11/94)

Printed in U.S.A.